

ViewSonic  COMMERCIAL DISPLAY
CDE7520

Key Features

- Easy cast function
- Wireless presentation across devices and rooms
- USB flash drive plug-and-play for photos, music & video
- Multitasking with powerful embedded player & OPS PC slot
- 4K slim bezel presentation display




Product Description

The ViewSonic® CDE7520 is a 75" 4K wireless presentation display. The built-in screen sharing software*, ViewBoard® Cast and Display, myViewBoard enable multiple users, whether on-site or on-line, to participate in conferences and share content with each other simultaneously, transforming the CDE7520 into a dynamic content hub. This reliable presentation display is equipped with a quad-core processor and internal memory, allowing constant multimedia play from internal storage or a USB flash drive. Supporting remote configuration and content management systems, the ViewSonic® CDE7520 is also suitable for diverse signage applications.

*Chrome, Android, Windows, Mac OS, and iOS compliant

*Miracast, Chromecast, and AirPlay support

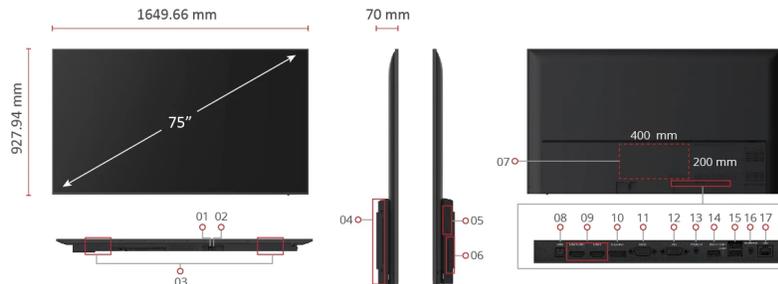

- | | | |
|-------------------------------|-----------------------------------|---------------------------------------|
| 1. AC In | 8. SPDIF | 15. USB 2.0 Type A x 2 (USB Playback) |
| 2. Power Switch | 9. HDMI In x 2 | 16. Audio Out |
| 3. Internal Speakers | 10. DisplayPort | 17. LAN |
| 4. OPS Slot | 11. RS232 | |
| 5. WiFi Slot | 12. VGA | |
| 6. Menu Controls | 13. Audio In | |
| 7. VESA® Wall Mount 400x200mm | 14. USB 3.0 Type A (USB Playback) | |

Visit Us  www.viewsonic.com

DISPLAY

Panel Size:	75"
Type/ Tech:	TFT LCD Module. IPS type, DLED backlight
Display Area (mm):	1649.664(H) × 927.936(V) (75" diagonal)
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	1.07G colors
Brightness:	450 nits (typ.)
Contrast Ratio:	1200:1 Typ. , 5000:1 Max.(DCR enable)
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	30,000 Hours (min)
Surface Treatment:	Anti-glare, 3H hardness, Haze 25%
Bezel:	Slim
Orientation:	Landscape

INPUT

HDMI:	x2
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1 (3.5mm)
RS-232:	x1
OPS Slot:	x1 (Optional Intel OPS VPC12-WPO)
WiFi Slot:	x1 (Optional WiFi module LB-WIFI-001)

OUTPUT

Audio:	x1 (3.5mm)
SPDIF:	x1 (Fiber)

LAN

RJ45:	x1
-------	----

USB

Type A:	2.0 Type A : x 2 (USB Playback) 3.0 Type A : x 1 (USB Playback)
---------	--

SPEAKERS

Max. 16Wx2

COMPATIBILITY

RGB PC/HDMI PC:	Up to 1920x1080@60Hz. Refer to timing table
HDMI:	480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz
DisplayPort:	480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz
Android Version:	Android 8.0

POWER

Voltage:	100V-240V,50/60Hz (AC)
Consumption:	Normal 107 W, Max 300 W

ERGONOMICS

Wall Mount (VESA®):	400x200 mm
---------------------	------------

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	20% ~ 80% non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	65.83 x 37.59 x 2.76 in/ 1672.0 x 955.0 x 70.0 mm
Packaging (inch / mm):	71.97 x 43.23 x 8.66 in/ 1828 x 1098 x 220 mm

WEIGHT

Net (lb / kg):	29.30 kg / 64.60 lbs (w/o stand)
Gross (lb / kg):	41.7 kg/91.93 lbs

REGULATIONS

cULus, FCC, Energy Star, EPEAT,MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, Custom Union, UkrSEPRO, RCM, MEPS

PACKAGE CONTENTS

1. CDE7520 presentation display
2. Remote control with batteries
3. Quick start guide
4. Power cables (1.5M)
5. HDMI cables x2 (1.5M/3M)
6. Wall mount screw
7. RS232 adapter