



COMMERCIAL DISPLAY
CDE6520

Key Features

- Easy cast function
- Wireless presentation across devices and rooms
- USB flash drive plug-and-play for photos, music & video
- Multitasking with powerful embedded player & OPS PC slot
- 4K slim bezel presentation display




Product Description

The ViewSonic® CDE6520 is a 65" 4K display. The built-in screen sharing software*, ViewBoard® Cast and myViewBoard Display enable multiple users, whether onsite or online, to participate in conferences and share content simultaneously, transforming the CDE6520 into a dynamic content hub. This reliable presentation display is equipped with a quad-core processor and internal memory, allowing constant multimedia play from internal storage or a USB flash drive. Supporting remote configuration and content management systems, the ViewSonic® CDE6520 is also suitable for diverse signage applications.

*Chrome, Android, Windows, Mac OS, and iOS compliant

*Miracast, Chromecast, and AirPlay support

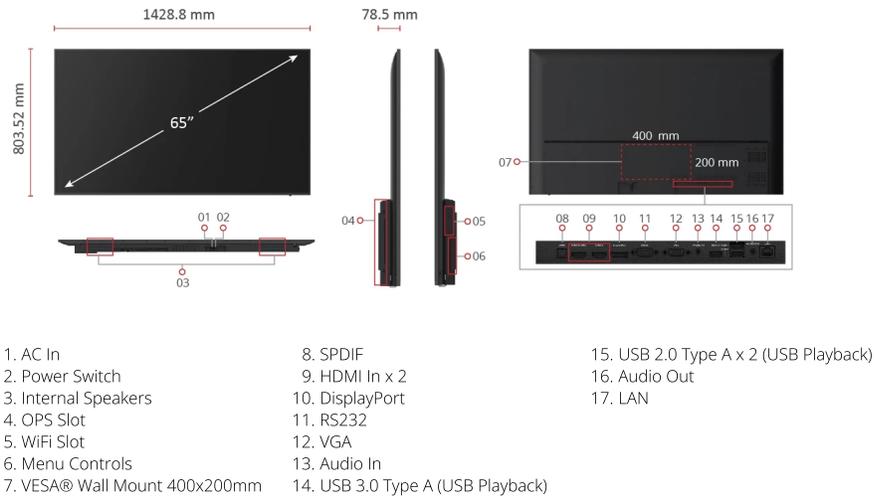

Visit Us  www.viewsonic.com

DISPLAY

Panel Size:	65"
Type/ Tech:	TFT LCD Module. IPS type, DLED backlight
Display Area (mm):	1428.48(H) × 803.52(V) (65" diagonal)
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	1.07G colors
Brightness:	450 nits (typ.)
Contrast Ratio:	1200:1 Typ. , 5000:1 Max.(DCR enable)
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	30,000 Hours (min)
Surface Treatment:	Anti-glare, 3H hardness, Haze 25%
Bezel:	Slim
Orientation:	Landscape

INPUT

HDMI:	x2
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1 (3.5mm)
RS-232:	x1
OPS Slot:	x1 (Optional Intel OPS VPC12-WPO)
WiFi Slot:	x1 (Optional WiFi module LB-WIFI-001)

OUTPUT

Audio:	x1 (3.5mm)
SPDIF:	x1 (Fiber)

LAN

RJ45:	x1
-------	----

USB

Type A:	2.0 Type A : x 2 (USB Playback) 3.0 Type A : x 1 (USB Playback)
---------	--

SPEAKERS

Max. 16Wx2

COMPATIBILITY

RGB PC/HDMI PC:	Up to 1920x1080@60Hz. Refer to timing table
HDMI:	480i, 480p,720p,1080i,1080p, 4K2K@60Hz
DisplayPort:	480i, 480p,720p,1080i,1080p, 4K2K@60Hz
Android Version:	Android 8.0

POWER

Voltage:	100V-240V,50/60Hz (AC)
Consumption:	Normal 97 W, Max 300 W

ERGONOMICS

Wall Mount (VESA®):	400x200 mm
----------------------	------------

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	20% ~ 80% non- condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	57.11 x 32.60 x 3.09 in/ 1450.6 x 828.1 x 78.5 mm
Packaging (inch / mm):	63.19 x 37.99 x 8.66 in/1605 x 965 x 220 mm

WEIGHT

Net (lb / kg):	22.95 kg / 50.59 lbs (w/o stand)
Gross (lb / kg):	33.6 kg/74.07 lbs

REGULATIONS

cULus, FCC, Energy Star, EPEAT,MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, Custom Union, UkrSEPRO, RCM, MEPS

PACKAGE CONTENTS

1. CDE6520 presentation display
2. Remote control with batteries
3. Quick start guide
4. Power cables (1.5M)
5. HDMI cables x2 (1.5M/3M)
6. Wall mount screw
7. RS232 adapter