



EPOSTER EP5542


Key Features

- Slim, freestanding design for modern settings
- Exceptional picture quality
- Superb processing power with built-in quad-core media player
- Total remote control with RS232 commands within Local Area Network
- Effortless integrated device and content management



Product Description

Uber-sleek and slim, the freestanding ViewSonic EP5542 is the ideal digital ePoster kiosk for high-impact visual messaging. Designed with a scratch-proof glass faceplate for added durability, it delivers unsurpassable visibility regardless of dust or ambient light. The 4K UHD IPS panel is equipped with dual 10W stereo speakers, 178° wide-angle viewing, and 450 nits of brightness, projecting crisp, vivid images and videos to engage the crowd. The EP5542 allows seamless multimedia playback with its embedded Quad-core media player and 16GB worth of internal memory. Made for effortless remote control, manage settings of multiple devices wherever via the vController app integrated with RS232 and LAN command.

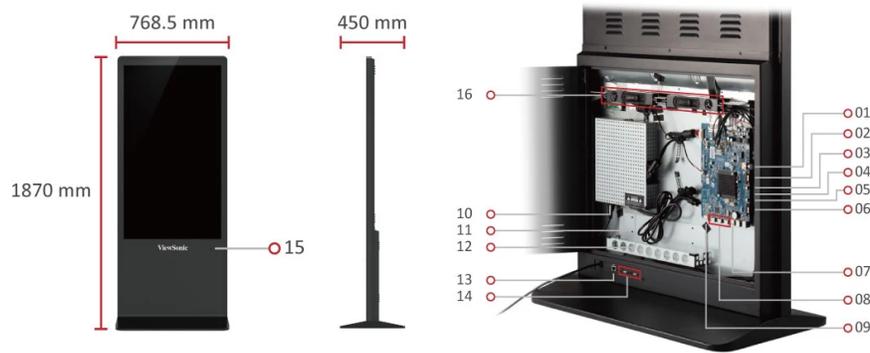

1. RJ45(LAN In)
2. RS232
3. Audio Out
4. SD/TF

8. HDMI In x3
9. DP In
10. AC Out
11. Power Switch

15. Remote Sensor
16. Internal Speakers

- 4. DVI-D
- 5. PC In(Audio)
- 6. PC In(VGA)
- 7. USB 2.0(Type A)

- 11. POWER SWITCH
- 12. AC In
- 13. RJ45
- 14. USB 2.0(Type A) x2

Visit Us  www.viewsonic.com

DISPLAY

| | |
|--------------------|----------------------------------|
| Panel Size: | 55" |
| Type/Tech: | TFT LCD (VA type,DLED Backlight) |
| Display Area (mm): | 1209.6 (H) x 680.4 (V) |
| Aspect Ratio: | 9:16 |
| Native Resolution: | 2160 x 3840 |
| Colors: | 1.07B |
| Brightness: | 450 nits (typ.) |
| Contrast Ratio: | 1300:1 (typ.) |
| Response Time: | 9 ms (typ. G to G) |
| Viewing Angles: | H = 178, V = 178 typ. |
| Backlight Life: | 30,000 Hours Typ. |
| Surface Treatment: | Anti-Glare 3H, Haze = 2% |
| Orientation: | Portrait |

INPUT

| | |
|--------------|---------------------|
| HDMI: | (2.0) x 3 |
| RGB / VGA: | x1 |
| DisplayPort: | (1.2) x 1 |
| Audio: | x1 PC audio(3.5 mm) |
| RS232: | x1 |

OUTPUT

| | |
|--------|-------------------|
| Audio: | x1 (Earphone out) |
| SPDIF: | x1 |

LAN

| | |
|-------|----|
| RJ45: | x1 |
|-------|----|

USB

| | |
|---------|----------|
| Type A: | x3 (2.0) |
|---------|----------|

SPEAKERS

| |
|---------|
| 10W x 2 |
|---------|

COMPATIBILITY

| | |
|-----------------|-------------------|
| RGB PC/HDMI PC: | 1920 x 1080 @60Hz |
| HDMI: | 2160 x 3840 @60Hz |
| DisplayPort: | 2160 x 3840 @60Hz |

ANDROID VERSION

| |
|-----|
| 8.0 |
|-----|

MULTIMEDIA

Image: JPG, BMP, PNG
 Video: MP4, MOV, MKV, DAT, MPG, MPEG, AVI, TS, WMV, RM, RMVB
 Audio: MP3, WAV, AAC

BUNDLE SOFTWARE

| |
|---|
| Revel Digital, SureMDM(license sold separately) |
|---|

POWER

| | |
|--------------|--|
| Voltage: | 100-240VAC +/- 10% Wide Range |
| Consumption: | 126 W (Normal), 149 W (Max.), < 0.5W (Off) |

OPERATING CONDITIONS

| | |
|--------------------|--------------------------|
| Temperature (° C): | 0°C to 40°C |
| Humidity: | 20% ~ 80% non-condensing |

DIMENSIONS (W X H X D)

| | |
|------------------------|---|
| Physical (inch / mm): | 30.26 x 73.62 x 17.72 in / 768.5 x 1870 x 450 mm |
| Packaging (inch / mm): | 38.19 x 80.08 x 23.98 in / 970 x 2034 x 609 mm |

WEIGHT

| | |
|------------------|----------------------|
| Net (lb / kg): | 138.23 lbs / 62.7 kg |
| Gross (lb / kg): | 164.69 lbs / 74.7 kg |

REGULATIONS

cTUVus, FCC, Energy Star 8.0, CE, CB, RoHS, ErP, EEI, WEEE, BSMI

PACKAGE CONTENTS

1. Power Cord
2. Remote control with battery
3. Quick Start Guide
4. Key *Actual content may differ from market to market