

ViewSonic  LCD DISPLAY
VA3209U-4K


Key Features

- SuperClear® IPS panel
- 4K UHD 3840 x 2160 resolution
- HDMI, Display Port, and USB-C inputs for simple connectivity and 65W power delivery
- HDR10 delivers stellar contrast and color accuracy
- Eyecare technology for comfortable viewing



Product Description

The ViewSonic VG3209U-4K is a 32" UHD monitor featuring HDMI, Display Port and USB-C inputs for business and home use. Simplify your work with just one cable that provides audiovisual and 65W power transfer. The eye-care technology, and various ViewMode presets cater for optimal screen performance and comfortable viewing without tearing or stuttering. Expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at low energy consumption.

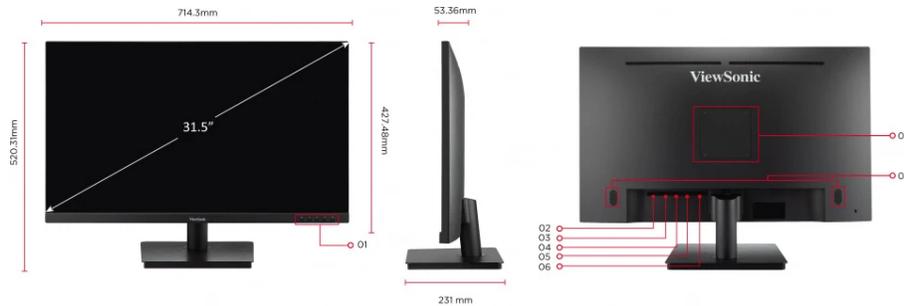

1. Menu Control Panel
2. Power In
3. HDMI*2
4. Display Port
5. Type C
6. Audio Out

7. VESA Compatible(Wall Mount 100 x 100 mm)
8. Speakers

Visit Us www.viewsonic.com

DISPLAY

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	IPS Technology
Resolution:	3840 x 2160
Resolution Type:	UHD (Ultra HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	350 cd/m ² (typ)
Colors:	1.07B
Color Space Support:	10 bit (8 bit + A-FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Flicker-Free:	Yes

Color Gamut:	NTSC: 91% size (Typ) sRGB: 128% size / 99% coverage (Typ)
Pixel Pitch:	0.182 mm (H) x 0.182 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	3840x2160
Mac® Resolution (max):	3840x2160
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	3840x2160

CONNECTOR

USB 3.2 Type C DisplayPort Alt mode only :	1 (65W power charger)
3.5mm Audio Out:	1
HDMI 2.0 (with HDCP 2.2):	2
DisplayPort:	1
Power in:	DC Socket (Center Positive)

AUDIO

Internal Speakers:	2.5Watts x2
--------------------	-------------

POWER

Eco Mode (Conserve):	27W
Eco Mode (optimized):	35W
Consumption (typical):	43W
Consumption (max):	47W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	HDMI (v2.0): 15 ~ 140KHz, DisplayPort (v1.4): 24 ~ 140KHz, Type C: 24 ~ 140KHz
Frequency Vertical:	HDMI (v2.0): 24 ~ 75Hz, DisplayPort (v1.4): 48 ~ 75Hz, Type C: 48 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDs - HDMI (v2.0), PCI-E - DisplayPort (v1.4), Micro-Packet - Type C
---------------	---

ERGONOMICS

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	17.6
Net Without Stand (lbs):	14.8
Gross (lbs):	22.5

WEIGHT (METRIC)

Net (kg):	8
Net Without Stand (kg):	6.7
Gross (kg):	10.2

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	30.3 x 20.1 x 4.9
Physical (in.):	28.1 x 20.5 x 9.1
Physical Without Stand (in.):	28.1 x 16.8 x 2.3

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	770 x 510 x 125
Physical (mm):	714 x 520 x 231
Physical Without Stand (mm):	714 x 428 x 59

GENERAL

Regulations:	RoHS, WEEE, KC, K-MEPS, BIS
--------------	-----------------------------

PACKAGE CONTENTS:	VA3209U-4K x1, 3-pin Mickey Mouse Plug (IEC C5) x1, HDMI Cable (v2.0; Male-Male) x1, USB Type-C Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
-------------------	--

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Warranty:	*Warranty offered may differ from market to market
-----------	--